

# JVI Designs





Lighting with a personal touch

## Assembly Instructions for ~~1015 to 1017~~

1150/1151

We recommend installation of this fixture be done by a licensed electrician. Turn off power at the main fuse or circuit breaker box.

\*\* Actual parts may vary slightly depending upon the model

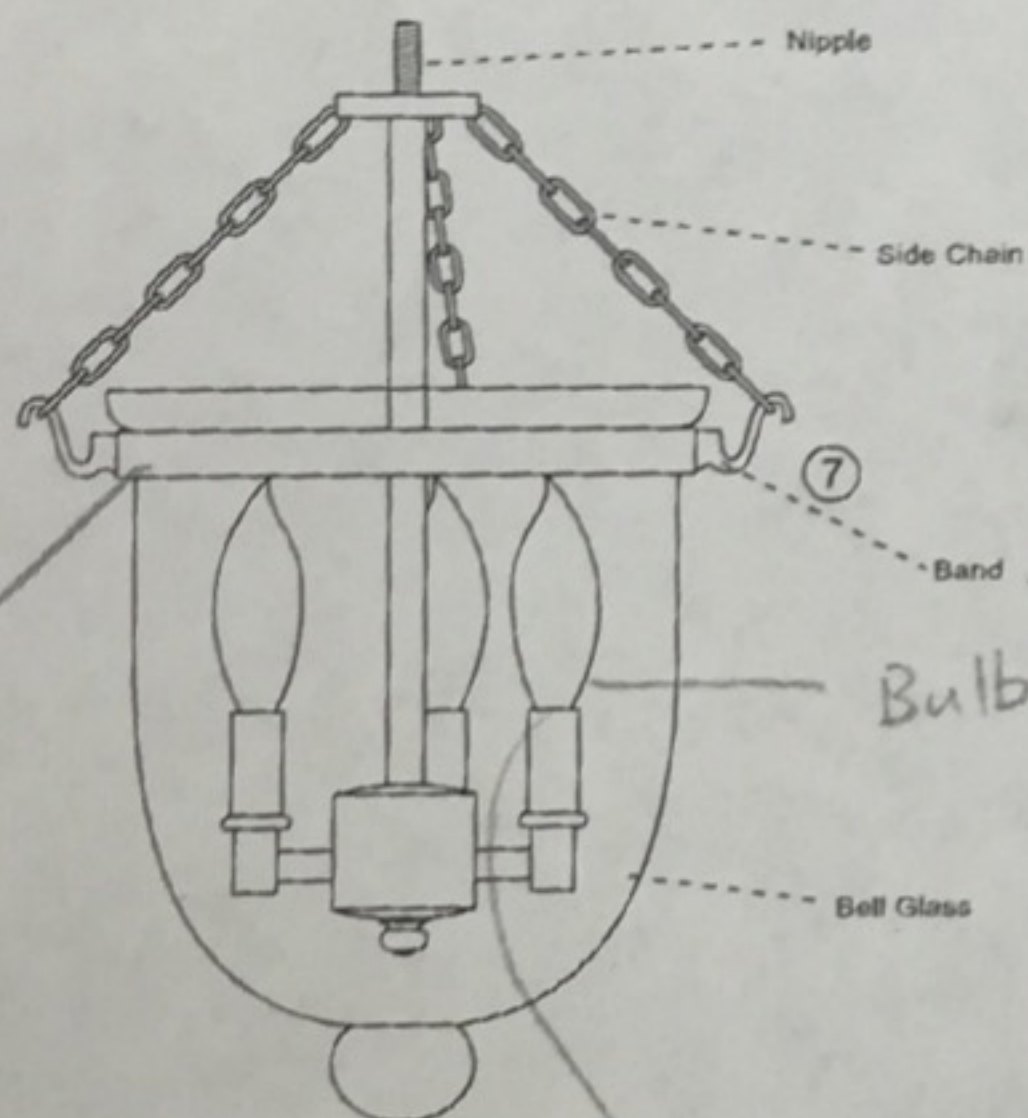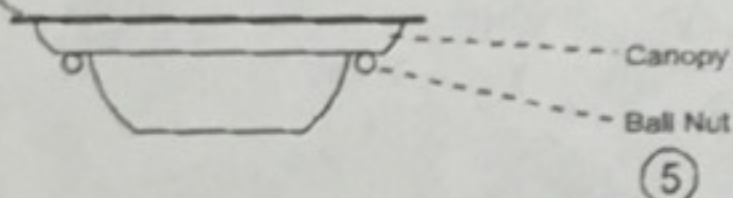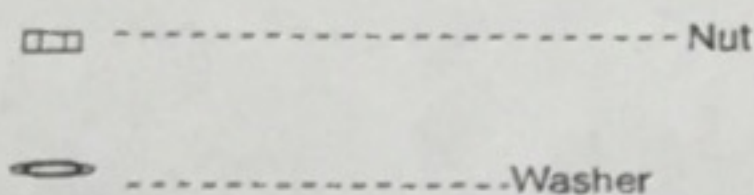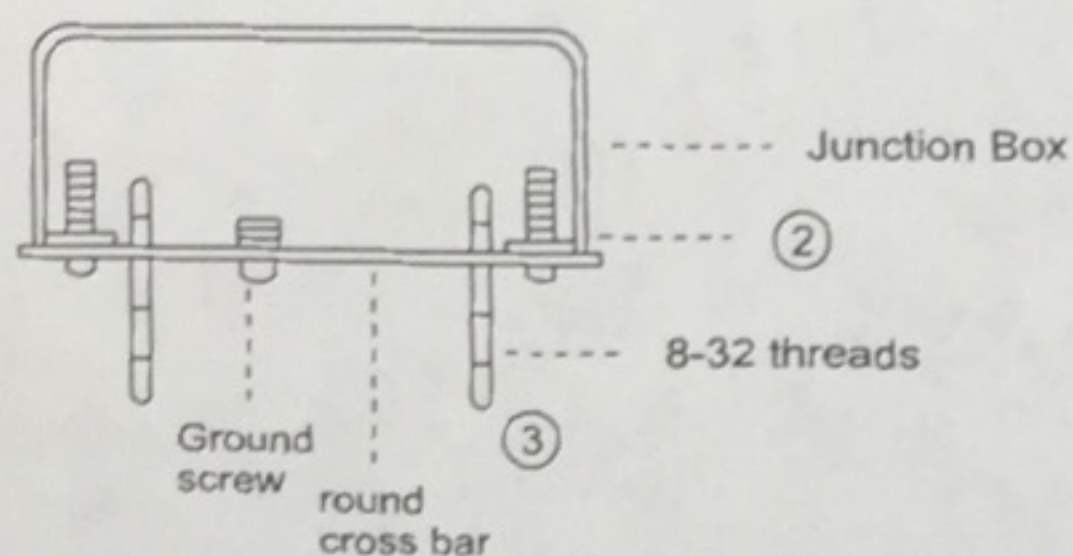

1. Remove the parts carefully from the box before discarding the carton.
2. Attach the cross bar to the outlet box with ground screw facing down.
3. Thread long screw into the bar beyond the canopy of the fixture.
4. If applicable, Fasten ground wire to green screw. Fasten lead wire with ridges to the white wire. Use wire nut to fasten it. Fasten smooth lead wire to the black wire in the box & use wire nut to fasten it.
5. Using ball nut, fasten the fixture to the outlet box.
6. Place the band on the neck of the bell glass.
7. After installation of bulbs, attach bell glass to 3 side chain to the hooks of the band.
8. Restore circuit breaker.

Use correct canopy

Use correct band (from 1022)

make fixture bigger!