




Assembly Instructions for 1157/1158

We recommend installation of this fixture be done by a licensed electrician. Turn off power at the main fuse or circuit breaker box.

**** Actual parts may vary slightly depending upon the model**

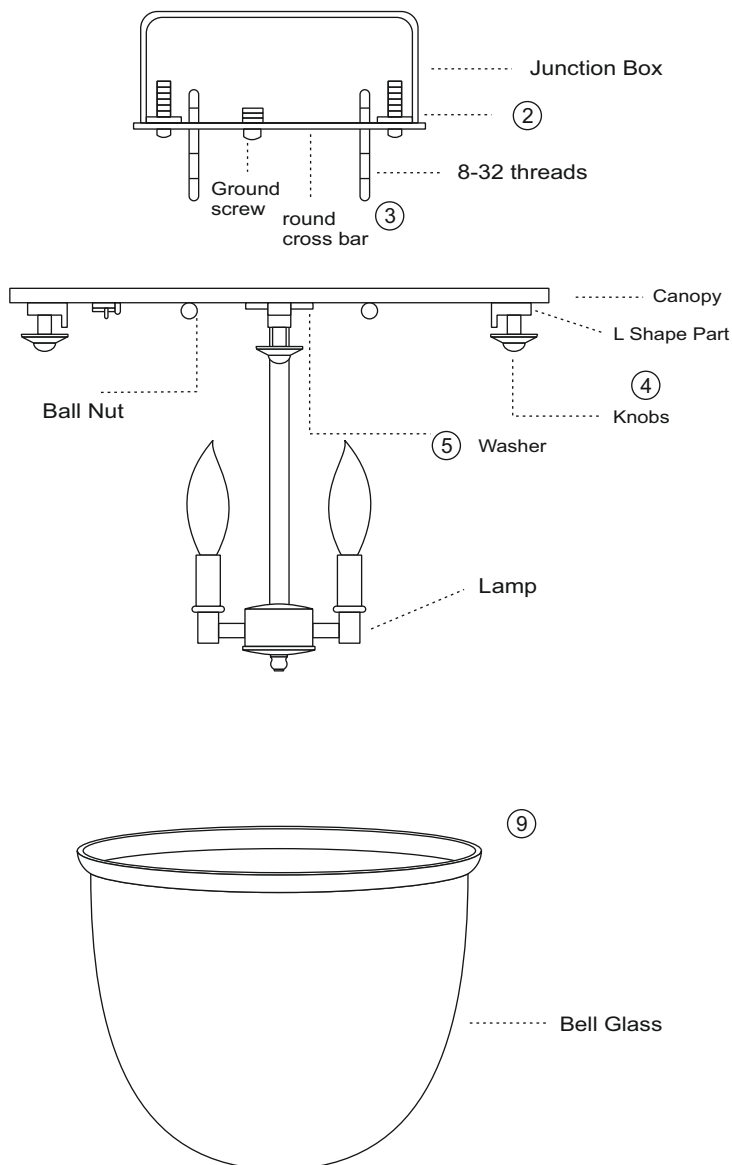

1. Remove the parts care from the box before discarding the carton.
2. Attach the cross bar to the outlet box with ground screw facing down.
3. Thread long screw into the bar beyond the canopy of the fixture.
4. Remove 3 knobs attached to the sides of the canopy.
5. Using hex nut on the top of nipple, install "lamp" to the top "canopy". One washer goes to inside the canopy and second washer goes to outside the canopy.
6. If applicable, Fasten ground wire to green screw. Fasten lead wire with ridges to the white wire. Use wire nut to fasten it. Fasten smooth lead wire to the black wire in the box & use wire nut to fasten it.
7. Using ball nut, fasten the fixture (with lamp installed) to the outlet box.
8. Install the bulbs.
9. Height of the mouth blown bell glass may vary slightly; if needed adjust the L shape part where glass rest by unscrewing 2 screws behind canopy. Usually this step is not necessary.
10. Install the glass ; screw in 3 knobs to secure the glass.
11. Restore circuit breaker.